
Drain – Bedding and Backfill Requirements A140.12



GENERAL

DESIGN STATEMENT

Drain bedding and backfill requirements are critical to ensure that underground and drainage pipes have adequate protection and support and in turn provide adequate support for nature strips, road pavements and/or kerb and channel.

APPLICABLE LOCATION

Drain bedding and backfill requirements should be used for all pipe laying works.

COUNCIL STANDARD DRAWING

SD 131 Drain – Bedding and backfill requirements.

CROSS REFERENCE DOCUMENT

- N/A

STANDARD SPECIFICATION

N/A

SUPPLIER

N/A

MAINTENANCE


N/A

GENERAL NOTES

1. *Top soil backfill to be top soil previously stripped from the area or imported sandy loam.*
2. *Grass seed mix to be 'Dry Land Mix' or similar. The sowing rate shall be at 45gm/m.*




A140.12 Drain – Bedding and Backfill Requirements

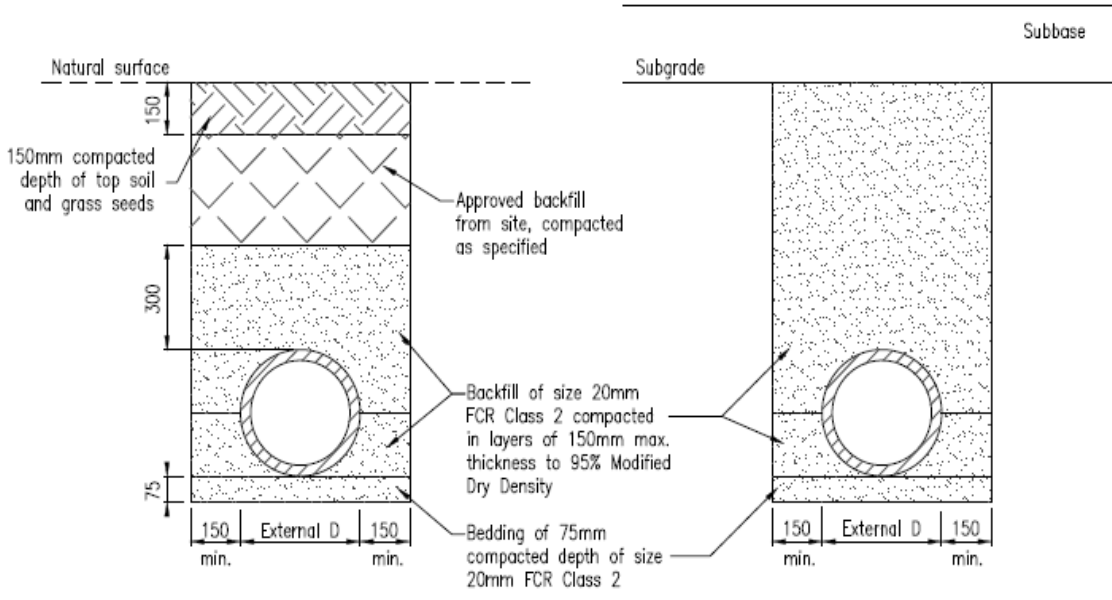

TRENCH IN NATURE STRIP

TRENCH UNDER PAVEMENT AND/OR K&C

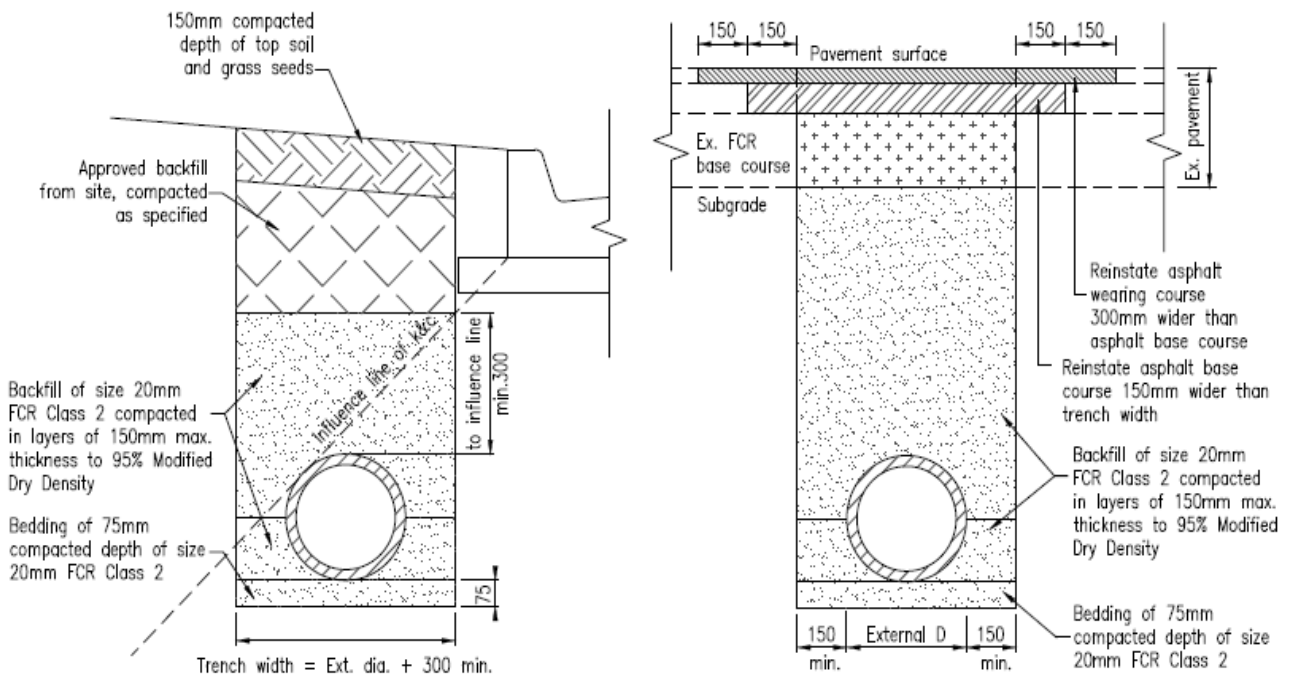

TRENCH BEHIND KERB & CHANNEL

TRENCH UNDER EXISTING PAVEMENT