



DESIGN STATEMENT

The Moreland parks standard fence is designed to be highly transparent, with clean lines and simple geometry. Its purpose is primarily to prevent unauthorised vehicle incursion into park spaces while delineating the open space. Pedestrian openings at frequent intervals provide for a highly permeable and inviting park edge.

APPLICABLE LOCATION

Moreland parks and sportsgrounds.

COUNCIL STANDARD DRAWING

N/A

CROSS REFERENCE DOCUMENT

- 150.04 Park Fence

STANDARD SPECIFICATION

Fence: 900mm high with galvanised steel tubular rail

Post: 125x125x1800 white cypress pine post.

SUPPLIER

N/A


MAINTENANCE

N/A

GENERAL NOTES


1. Refer to manufacturer's installation manual

B150.05 Park Rail

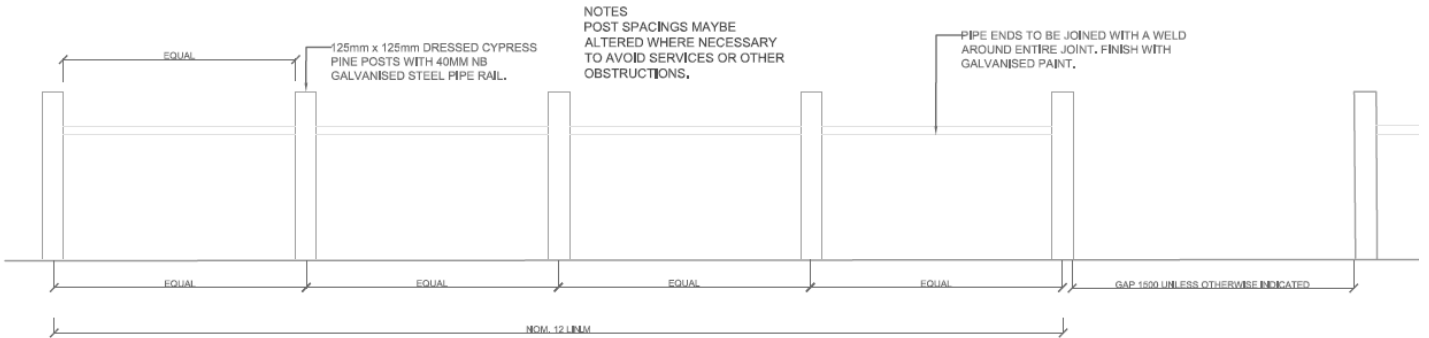

NOTES
 HOLES, GENERALLY, SHOULD NOT BE DRILLED COMPLETELY THROUGH END POSTS. HOWEVER, IF NECESSARY, PIPE HOLES SHOULD BE FILLED WITH WOODEN PLUG TO FIT AND PIPE FIXED WITH ADHESIVE OR SECURELY FASTENED IN PLACE WITH BOLTS OR SCREWS.

SET POSTS VERTICALLY AND SET IN STRAIGHT LINES.

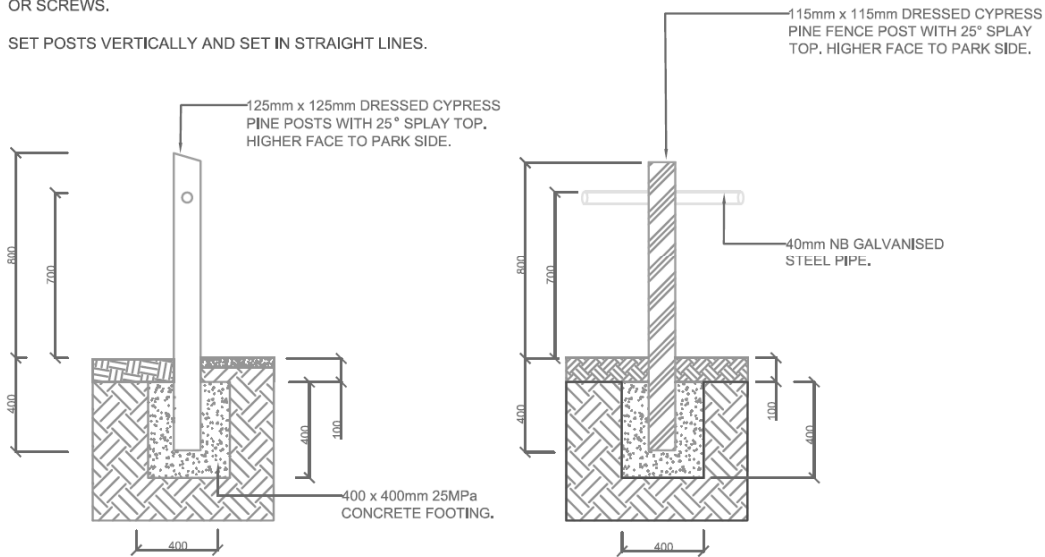

SIDE VIEW

FRONT VIEW

115mm x 115mm DRESSED CYPRESS PINE BOLLARD WITH 25° SPLAY TOP. BOLLARD COMPLETE WITH GALVANISED METAL BRACKET AROUND BASE OF BOLLARD TO PREVENT SWELLING. INSTALL GALVANISED SLEEVE TO SUIT WITH HINGED LID TO ENABLE BOLLARD TO BE LOCKED IN PLACE.

